

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057398 A1

(51) International Patent Classification⁷: **G02B 7/00, 7/182**

(74) Agent: **GROUP IP DEPARTMENT**: Bae Systems plc,
Lancaster House, P.O. Box 87, Farnborough Aerospace
Centre, Farnborough, Hampshire GU14 6YU (GB).

(21) International Application Number:
PCT/GB2003/005547

(22) International Filing Date:
18 December 2003 (18.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0230038.2 23 December 2002 (23.12.2002) GB
0309979.3 30 April 2003 (30.04.2003) GB

(81) Designated States (*national*): AE, AG, AI, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,
GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **BAE
SYSTEMS PLC** [GB/GB]; 6 Carlton Gardens, London
SW1Y 5AD (GB).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **GRIFFITH,
Michael, Stewart** [GB/GB]; BAE Systems ATC, West
Hanningfield Road, Great Baddow, Chelmsford, Essex
CM2 8HN (GB). **ARCHER, Nicholas, John** [GB/GB];
BAE Systems ATC, West Hanningfield Road, Great Bad-
dow, Chelmsford, Essex CM2 8HN (GB). **LAYCOCK,
Leslie, Charles** [GB/GB]; BAE Systems ATC, West
Hanningfield Road, Great Baddow, Chelmsford, Essex
CM2 8HN (GB).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: **DEFORMABLE-MIRROR HOLDER**

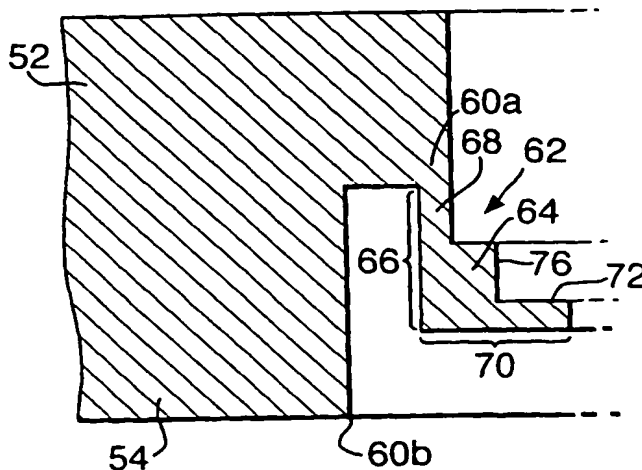

(57) Abstract: This invention relates to a deformable-mir-
ror holder for holding a mirror in a desired position,
to within accepted tolerances, even whilst the mirror
is deforming or in a deformed state. In particular, this
invention relates to a holder for a bimorph mirror. A
deformable-mirror holder is provided comprising a body
with a central aperture for receiving a deformable mirror,
the central aperture being defined by a plurality of flexible
beams, with each flexible beam having an end shaped to
provide a supporting surface and a flexible portion that
connects the beam's end to the holder's body.

DEFORMABLE-MIRROR HOLDER

This invention relates to a deformable-mirror holder for holding a mirror in a desired position, to within accepted tolerances, even whilst the mirror is deforming or in a deformed state. In particular, this invention relates to a holder
5 for a bimorph mirror.

Deformable mirrors are often used in the field of adaptive optics. For example, phase distortions in a signal may be sensed by a wavefront sensor and these distortions may be corrected for by an adaptive mirror. Such adaptive mirrors may be employed in numerous fields, including:

- 10 • imaging, for example adaptive mirrors are used in astronomy to improve the resolution of earth-based telescopes that are otherwise affected by atmospheric distortions;
- laser sensing, where the amount of laser light that can be delivered onto a target is significantly increased by using an adaptive mirror to correct for
15 atmospheric distortions - this enables either better information to be obtained or objects to be identified at a greater range; and
- laser generation, where an adaptive mirror can be used intracavity within a high power laser to counter the thermal blooming that can be otherwise induced by the high concentration of laser light inside the cavity.

20 Bimorph deformable mirrors have been proposed as low cost adaptive mirrors. The two main operational parameters of a bimorph mirror are its bandwidth and its stroke. Bandwidth determines how quickly the mirror can be deformed and hence, for example, how quickly the mirror can respond to the variations in atmospheric turbulence. Stroke corresponds to the maximum
25 displacement of the mirror when deformed and this determines, for example, the level of turbulence that can be corrected. Ideally, both bandwidth and stroke would be maximised. However, conventional designs mean that there is a reciprocal relationship between these two parameters, and one parameter can only be improved at the expense of the other. Therefore, to date, designers
30 have always looked for ways to improve either the resonant frequency or the stroke independently from each other.

- 2 -

Conventionally, deformable mirrors are supported rigidly around their edge, for example an annular ring overlapping the periphery of the mirror is used to hold the mirror firmly in position. Such an arrangement benefits from being simple yet rugged. However, it has an inherent disadvantage in that it
5 creates a dead space around the mirror's edge. This corresponds both to the area of the mirror held firmly under the annular ring and also to the adjacent area. This is because the useable area of the deformable mirror (the active area) must bend to adopt a desired profile, for example either a concave or a convex shape. The annular area between the active area and the annular ring
10 must bend in the opposite sense and so forms an area of inflexion that has undesirable optical properties. Hence the active area occupies only a central portion of the whole mirror. This is illustrated in Figures 1 to 3, albeit with the deformation of the mirror exaggerated for the sake of clarity.

One way of alleviating this problem is to clamp the mirror at only three
15 positions, such that the mirror edge can twist. However, this arrangement is to the detriment of ruggedness and the twisting introduces unwanted distortions leading to an optically inferior performance.

Against this background, the present invention resides in a deformable-mirror holder comprising a body with a central aperture for receiving a
20 deformable mirror, the central aperture being defined by a plurality of flexible beams, with each flexible beam having an end shaped to provide a supporting surface and a flexible portion that connects the beam's end to the holder's body. The supporting surface is provided for supporting a peripheral edge of the mirror.

25 Accordingly, we have devised a deformable-mirror holder that simply supports the mirror uniformly around the edge and where the beams deflect with the mirror as it deforms, thereby allowing the deformable mirror to move like a simply-supported diaphragm. In this way, the deformable mirror is supported such that the ratio of the total diameter to active diameter is
30 minimised. In addition, the above holder allows the mirror to be as small as possible.

- 3 -

Optionally, the ends of the flexible beams are co-joined to form a unitary structure shaped to provide a supporting surface. Such a structure would support the mirror around the entirety of its peripheral edge.

Preferably, the beams' ends lie in the plane of the mount's body such that, in use, the mirror is positioned within the mount's body. This simple arrangement ensures that the holder's body affords the mirror an element of protection. Alternatively, the beam's ends may lie outside of the plane of the body such that the mirror is held clear of the holder's body.

Optionally, at least one beam is generally L-shaped such that one leg of the L-shape provides the flexible portion and the other leg of the L-shape provides the supporting surface of the beam's end. In a currently preferred embodiment, the internal corner of the L-shaped beam has a shoulder that extends part of the way along both legs of the L-shape. This adds rigidity to the part of the beam that supports the mirror in use and a flexible neck is created that allows the supporting end to bend with the mirror.

Preferably, the plurality of flexible beams are arranged around the entire aperture. Alternatively, a small number of beams may be provided around the aperture, for example three or four equispaced around the aperture. Where the beams are arranged around the entire aperture, the width of the beams may optionally be larger than the separation between beams. Preferably, the width of the beams is greater than four times the separation between beams. This arrangement means that the holder is flexible in the radial direction, but exhibits stiffness in all other directions.

Optionally, the flexures are shaped to provide vertical movement at the mirror's edge. Each of the flexures could have a bar shape for supporting a continuous ring, which in turn could be used to support the mirror for example.

Optionally, wire bonding techniques can be effectively applied in the present invention where a large number of connections to piezoelectric (PZT) elements on a mirror are required to be made.

The present invention also extends to a deformable mirror and a deformable-mirror holder as described above.

- 4 -

In order that the invention can be more readily understood, reference will now be made, by way of example only, to the accompanying drawings in which:

Figure 1 is a plan view of a deformable mirror and a mount according to the prior art;

5 Figure 2 is a cross-section through line II-II of Figure 1 showing the mirror in a relaxed state;

Figure 3 corresponds to Figure 2 but with the mirror in a state of exaggerated deformation thereby illustrating the problem of dead space and the relatively small active area;

10 Figure 4 is a plan view of a deformable mirror and a mount according to a first embodiment the present invention;

Figure 5 is a cross-section through line V-V of Figure 4 showing the mirror in a relaxed state;

15 Figure 6 corresponds to Figure 2 but with the mirror in a state of deformation;

Figure 7 is a detail from Figure 5;

Figure 8 is a perspective view of part of the mount of Figure 5;

Figure 9 corresponds to Figure 7 but for a second embodiment of the present invention;

20 Figure 10 corresponds to Figure 7 but for a third embodiment of the present invention;

Figure 11 is a cross-sectional view of a fourth embodiment of the present invention;

25 Figure 12 is a perspective view of part of the mount of Figure 11, with the mirror removed;

Figure 13 is a further perspective view of a part of the mount of Figure 11, with the mirror in place;

- 5 -

Figure 14 is a view of a bar flexure design embodying the present invention from above (a) and below (b);

Figure 15 is a cross-sectional view of the embodiment of Figure 14;

Figure 16 is a view of the mirror mount using the bar flexure design of
5 Figure 14 (without the mirror in place); and

Figure 17 shows one way of effectively applying wire bonding techniques for the purpose of making connections to the piezoelectric (PZT) elements in an embodiment of the present invention.

A deformable bimorph mirror 10 and its mount 12 according to the prior
10 art are shown in Figures 1 to 3. As can be seen, the mirror 10 is disc-shaped and is supported by the mount body 12. The mirror 10 is held firmly in position by an annular ring 14 that urges the mirror 10 against the mount body 12 via four screws 16. Figure 3 shows the mirror 10 in a deformed state such that, in this example, it adopts a convex profile for light approaching from above.
15 Ideally, the desired convex profile should extend across all the mirror 10, such that all the mirror 10 is available for reflecting light in the desired manner. However, the peripheral edge 18 of the mirror 10 is held firmly between the annular ring 14 and the mount body 12 and so cannot bend. Moreover there is a region 20 of the mirror 10 that adopts an area of inflexion to bridge the
20 peripheral edge 18 of the mirror 10 and the convex portion 22 at the centre of the mirror 10. It is of course this convex-shaped part 22 of the mirror 10 that forms the active (i.e. useable) part 22 of the mirror 10. This active part 22 of the mirror 10 is shown in Figure 3.

A deformable bimorph mirror 50 and a mount 52 according to a first
25 embodiment of the present invention are shown in Figures 4 to 8. The mount 52 in this case is simpler when compared to the prior art in that the mount 52 is a unitary structure made from stainless steel. The mount 52 comprises a round body 54 that defines a central circular aperture 56. The aperture 56 is shaped and sized to receive the disc-shaped deformable bimorph mirror 50 therein.
30 Hence, the mirror 50 is held in a protected position within the mount 52.

- 6 -

Whilst the outer edges of the mount's body 54 are regular, the internal edges 58 are stepped to form a series of three interconnected and concentric circular apertures 56a-c that increase in size from top to bottom. The stepped inner profile 58 of the mount 52 produces a series of three shoulders 60a-c.

5 Twenty generally L-shaped flexible beams 62 extend downwardly in cantilever fashion from the topmost 60a of these shoulders 60a-c. The twenty beams 62 are of identical size and shape and are equispaced around the circular topmost shoulder 60a. The beams 62 are L-shaped such that they extend downwardly from the topmost shoulder 60a before turning through 90° to extend inwardly

10 towards the centre of the middle aperture 56b. Rather than having a pure L-shape, a square-shaped support shoulder 64 extends from the internal corner of each beam 62 as best seen in Figure 7. The support shoulder 64 only extends partially up the height of the upright portion 66 of the beam 62, thereby leaving a narrow neck 68 in the portion of the beam 62 that bridges the topmost

15 shoulder 60a of the mount body 54 and the support shoulder 64 of the beam 62. It is this neck 68 that gives the beam 62 its flexibility, i.e. this neck 68 can be deformed to allow the beam 62 to deflect and bend. The length and thickness of the neck 68 of the beams 62 are chosen to achieve the desired flexing properties. Figure 8 shows four of the beams 62 in perspective and indicates

20 the width W of the beams 62 relative to their separation. It is the relative width of the beams 62 that gives the required degree of stiffness in the plane of the mirror 10.

The inwardly-extending portion 70 of the beam 62 extends beyond the support shoulder 64 to provide an upwardly-facing support surface 72 for

25 receiving the mirror 50. The mount 52 and the beams 62 are sized such that the mirror 10 may be received within the beams 62 to be supported from below by the support surfaces 72 and so that the mirror's edge 74 fits snugly against the upright face 76 of the support shoulders 64. Hence, the mirror 50 is held firmly in place.

30 The mirror 50 is best seen in Figure 5. The mirror 50 comprises a copper substrate 78 whose outer face provides a reflecting surface by virtue of a series of thin dielectric coatings provided on the outer surface (not shown).

- 7 -

An active piezoelectric element 80 is bonded to the non-reflective side copper substrate 78 using epoxy resin 82. It is important to ensure that a thin, uniform layer of the epoxy resin 82 is used to bond the piezoelectric element 80 to the substrate 78 in order to ensure maximum (and uniform) coupling efficiency of stress from the piezoelectric element 80 to the substrate 78. In this embodiment, this is achieved by mixing a small amount of spacers with the glue (these can be for example, silica/glass/polymeric/spheres or rods). This enables a known, uniform thickness of epoxy resin/glue to be formed. An array of forty-five electrodes 84 are used to activate the piezoelectric element 80. Applying a potential to the electrodes 84 causes the piezoelectric element 80 to deform so that, in turn, the copper substrate 78 deforms, as shown in Figure 6. This creates a convex-shaped mirror 50.

As the mirror 50 deforms, it remains firmly held in place against the support surface 72 and support shoulder 64 because the beam 62 deflects with the mirror 10 by flexing about its neck 68, as shown in Figure 6. Moreover, the beams 72 offer minimal resistance to the mirror 50 as its peripheral edge 74 rotates towards the mirror axis. This is because they have minimal stiffness radially and so require little force to deform radially towards the mirror centre. The mass and stiffness of the beams 62 are very small in comparison to that of the mirror 50 and therefore the beams 62 have minimal impact upon the mirror 50 deformation. In addition, the relatively large width W of the beams 62 provides stiffness in all directions in the plane of the mirror and torsionally about the mirror axis. The short length of the beams 62 provides stiffness in the axial direction.

Figure 6 shows that convex deformation of the mirror 50 extends to the very edge 74 of the mirror 50 and hence eliminates virtually all dead space from the mirror 50. Hence, the active area of the mirror 50 covers virtually the whole of the mirror 50. This is highly beneficial because a mirror mount 52 that prevents rotation of the mirror's peripheral edge 74 would need to be twice the diameter to obtain a similar convex active area and would have a first mode resonant frequency of half that of the simply supported mirror 50 of the present

- 8 -

invention. Thus, the present invention allows for a mirror 50 of much smaller size to be used to obtain the same stroke/bandwidth product.

The person skilled in the art will appreciate that modifications can be made to the embodiments described hereinabove without departing from the scope of the invention.

Details of the mirror 50 and how it is arranged to deform are given as useful background in which to set the context of the present invention, but are not essential to the invention. Other mirror configurations can be equally well accommodated by the present invention.

Whilst the above embodiment uses L-shaped beams 62, strict compliance with this shape is not necessary. For example, the support shoulders 64 may be omitted and the peripheral edge of the mirror 74 may abut against the upright face of the beam 62. This arrangement would lead to a longer neck 68 that could flex along its entire height. In addition, the beam 62 could be J-shaped rather than being L-shaped. This may be advantageous where the mirror 50 has rounded edges rather than square edges. In fact, the beam 62 may be shaped to conform to any profile the mirror 10 may have, e.g. to conform to chamfered edges.

Furthermore, the beams 62 need not necessarily extend downwardly from the mount body 54 to house the mirror 50 within the mount body 54. An alternative arrangement is shown in Figure 9, that broadly corresponds to the view shown in Figure 7 and so like reference numerals have been used for like parts but with the addition of a prime. In this embodiment, the flexible neck 68' is L-shaped such that, in addition to the flexible upright portion 86' that allows deflection as the mirror 50 deforms, there is a horizontal portion 88' that connects the upright portion 86' to the mount body 54. The horizontal portion 88' of the beam 62' allows vertical movement of the edges of the mirror 50, as indicated by the arrows in Figure 9. This is beneficial because the mirror 50 may be deformed to adopt shapes that require relative movement around the edge 74 of the mirror 50, e.g. to adopt radially-extending ridges and troughs thereby creating an undulating mirror edge 74.

- 9 -

A further alternative arrangement of the beams 62 is shown in Figure 10 where beams 62'' extend upwardly from the mount body 54'' (like reference numerals are used for like parts, the double prime denoting the parts that belong to the embodiment of Figure 10). Most importantly they retain the flexible neck 68'' that allows the beam 62'' to bend with the mirror (not shown) as it adopts a convex shape.

A yet further embodiment is shown in Figures 11 to 13. Again, like reference numerals are used for like parts, the triple prime denoting the parts that belong to the embodiment of Figures 11 to 13. In this embodiment, the mirror 50''' is supported at the top of the mount 52'''. The mount 52''' has an outer wall 90''' extending from the outer edge of its top surface. Twenty flexible beams 62''' extend from the inner edge 60a''' of the mount 52'''. The flexible beams 62''' comprise an L-shaped flexible neck 68''' that extends from the mount 52''' first upwardly as an upright portion 86''' before turning through 90° to extend inwardly as a horizontal portion 88'''. The horizontal portion 88''' of each of the flexible beams 62''' meets a unitary L-shaped annular ring 92''' that is shaped and sized to receive the mirror 50'''. The L-shape of the ring 92''' is such that it supports the mirror 50''' from the side and from below.

The advantage of this arrangement is that the shape of the flexible beams 62''' allows vertical movement of the mirror's edge. This provides additional enhancement by further minimising the ratio of the total diameter of the mirror 50''' to the active diameter. This reduces the overall mirror diameter required to achieve a given stroke for a set applied voltage and bandwidth by virtually eliminating any dead space from the outside of the mirror 50'''.

A yet further embodiment of the invention is shown in Figures 14 to 16. Figure 14 provides a view of a bar flexure design from above (a) and below (b). Figure 15 corresponds to a cross-sectional view of Figure 14 through one of the bar flexures 150. Figure 16 is a view of the whole mirror mount (without the mirror) using the bar flexure design of Figure 14. In this embodiment, the flexure is a bar 150 supporting a continuous ring, which in turn is used to support the mirror, but in this case fewer flexures are required. Conveniently,

- 10 -

as shown, a hole is machined down the middle of the bar flexure in order to reduce the rigidity of the flexure.

The advantage of the arrangement shown in Figures 14 to 16 is that the bar shape of the flexures allows vertical movement at the mirror's edge. This arrangement bears the additional advantage of being a straightforward design, making the mirror holder easy to machine.

It is also to be appreciated that standard methods for making connections to the piezoelectric (PZT) elements on a bimorph mirror are to either solder the wires on, or to use a conducting epoxy. Both of these methods are effective when the number of electrodes is relatively small e.g. up to 40. However, as the number of electrodes go up, making the connections becomes progressively more difficult:

- soldering onto the PZT element needs to be done quickly in order to ensure that the material does not de-pole slightly in the process. When 40 solder joints are required, this becomes more difficult. If all the electrodes are soldered at the same time, the risk of the material de-poling becomes that much greater. This can be avoided by letting the material cool down before starting the next joint, but this is time consuming.
- Using conductive epoxies is not that easy either. Care needs to be taken to ensure that not too much epoxy is used each time in order to avoid adding extra load onto the system. Also, the wires typically need supporting while the epoxy sets.

Wire bonding is seen by the inventors as a possible alternative to the above described techniques, but care must be taken in order to ensure that the wires do not touch. The inventors have recognised that careful application of the wire bonding technique bears the following definite advantages:

- Wire bonding can be automated, making the process quick and consistent with commercial assembly.

- 11 -

- Because the footprint of a wire bond is so small, the process does not add any significant load to the disc, even when a large number of connections (e.g. > 100) are required.
- The expected current to each element is relatively small (6mA) and is consistent with wire bonding techniques.
- The bend that is normally put into the bond wire during the bonding process ensures that the small amount of movement that the bond will be subjected to will not weaken the bond or the wire.

Having regard to the foregoing, wire bonding can be provided and Figure 17 shows one way of accomplishing this. Again, like reference numerals are used for like parts, the four primes denoting the parts that belong to the embodiment of Figure 17. As shown in Figure 17, a hole 101''' is punched through the PCB 102''' above each piezoelectric (PZT) electrode 84''' in order to enable access. This hole could typically be ~2mm in diameter and still provide access. As shown, the PCB sits very close to the PZT disc 80'', but must be at least twice as far as the movement expected from the mirror. The wire bond 103''' makes the connection between the PZT electrode 84 and the PCB track 104'''. A solder pin 105''' can be used for soldering to an external cable. The holder for the PCB 106''' is attached to the mirror base 54'''.

It is envisaged that this wire bond technique can be suitably used with other types of mounting arrangement if desired (for example, where the mirror is fixed rigidly).

As will be appreciated by the skilled person, other arrangements of the flexures/beams are possible. For example, the flexible beams 62 could extend inwardly to meet a supporting end of the beam 62. Essentially, any arrangement could be used where the supporting end of the beam 62 is connected to the mount body 54 by a flexible neck 68 that allows the supporting end to bend as the mirror 10 deforms.

Whilst the mount 52 of the above embodiments is made from stainless steel, many other materials such as other metals, plastics, glasses or ceramics could be used instead.

- 12 -

The present invention is perfectly well suited for use in supporting both uncooled and cooled bimorph mirrors. For example, the bimorph mirror may be water-cooled in order to dissipate heat absorbed from incident radiation.

CLAIMS

1. A deformable-mirror holder comprising a body with a central aperture for receiving a deformable mirror, the central aperture being defined by a plurality of flexible beams, with each flexible beam having an end shaped to provide a supporting surface and a flexible portion that connects the beam's end to the holder's body.
5
2. A deformable-mirror holder according to claim 1, wherein the ends of the flexible beams are co-joined to form a unitary structure shaped to provide a supporting surface.
10
3. A deformable-mirror holder according to claim 1 or claim 2, wherein the beams' ends lie in the plane of the holder's body such that, in use, the mirror is received within the holder's body.
15
4. A deformable-mirror holder according to any of claims 1 to 3, wherein at least one beam is generally L-shaped such that one leg of the L-shape provides the flexible portion and the other leg of the L-shape provides the supporting surface of the beam's end.
20
5. A deformable-mirror holder according to claim 4, wherein the internal corner of the L-shaped beam has a shoulder that extends part of the way along both legs of the L-shape.
25
6. A deformable-mirror holder according to any preceding claim, wherein the plurality of flexible beams are arranged around the entire aperture.

- 14 -

7. A deformable-mirror holder according to claim 6, wherein the width of the beams is larger than the separation between beams.
8. A deformable-mirror holder according to claim 7, wherein the width of the beams is greater than four times the separation between beams.
9. A deformable mirror and a deformable-mirror holder according to any preceding claim.
10. 10.A deformable mirror and a deformable-mirror holder according to claim 4, wherein the peripheral edge of the mirror is supported from below by one leg of the L-shaped beam and is supported from the side by the other leg of the L-shaped beam.
- 15 11.A deformable mirror and a deformable-mirror holder according to claim 5, wherein the peripheral edge of the mirror is supported from below by one leg of the L-shaped beam and is supported from the side by an inwardly-facing side of the shoulder.
- 20 12.A deformable-mirror holder as substantially described hereinbefore with reference to any of Figures 4 to 17 of the accompanying drawings.
- 13.A deformable mirror and a deformable-mirror holder as substantially described hereinbefore with reference to any of Figures 4 to 17 of the accompanying drawings.

Fig.1.

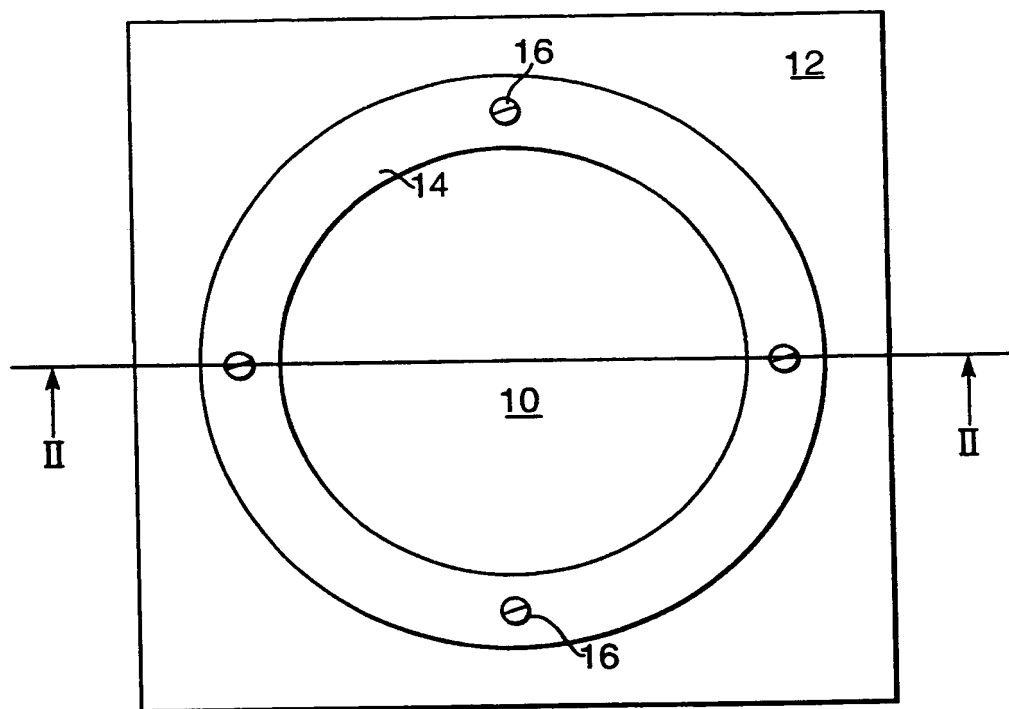


Fig.2.


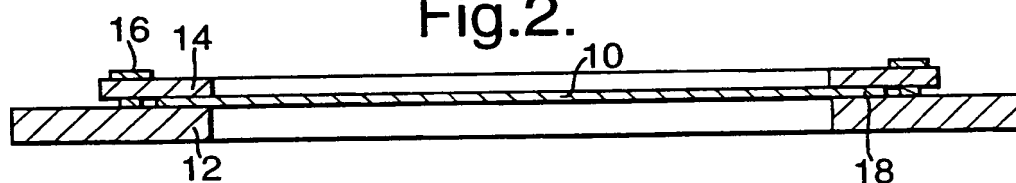


Fig.3.

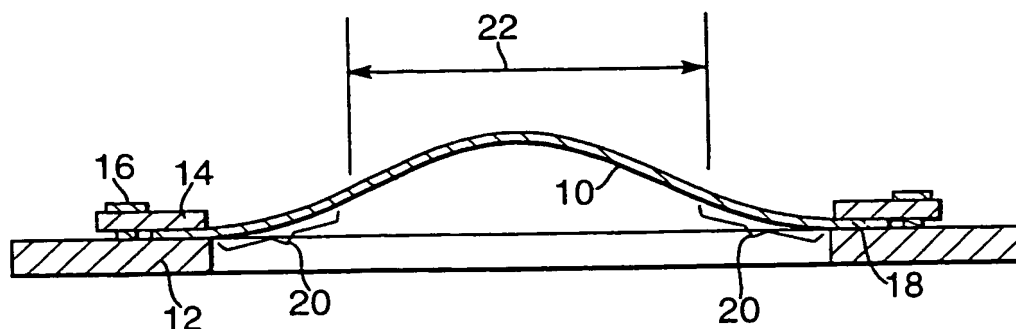

2/6

Fig.4.

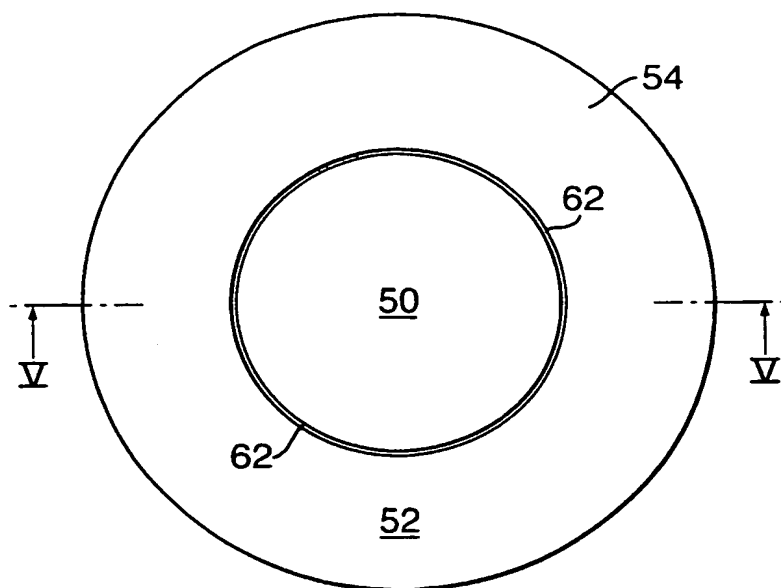


Fig.5.


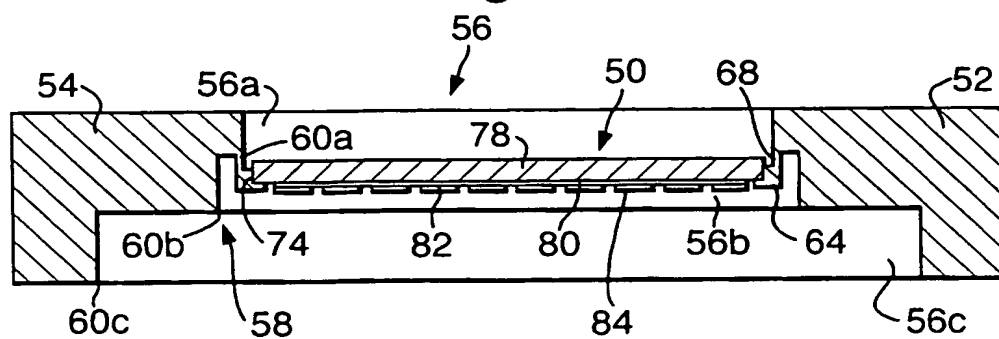


Fig.6.

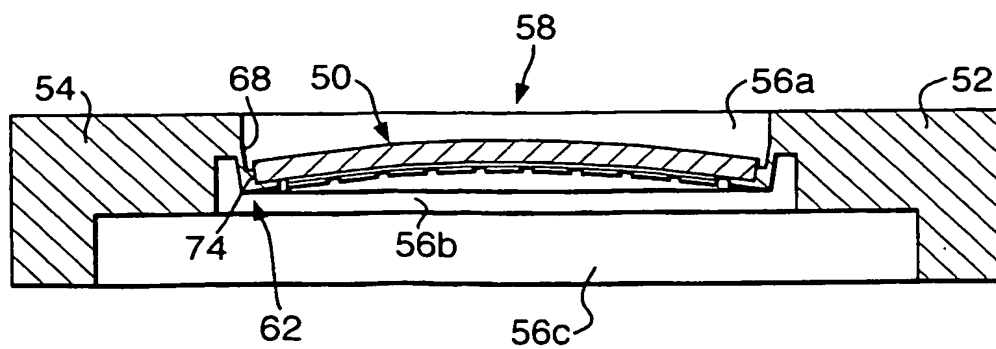

3/6

Fig.7.

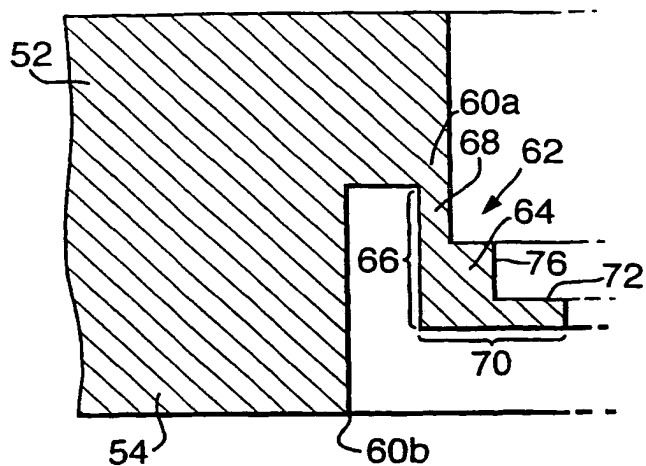


Fig.8.

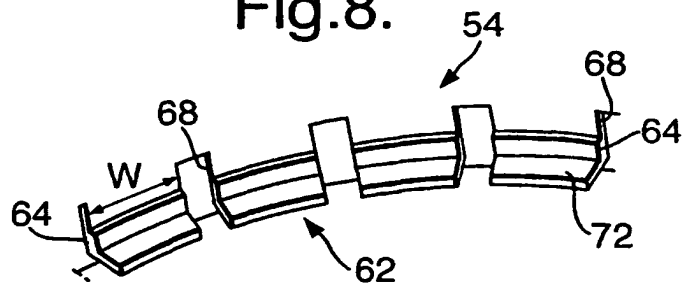


Fig.9.


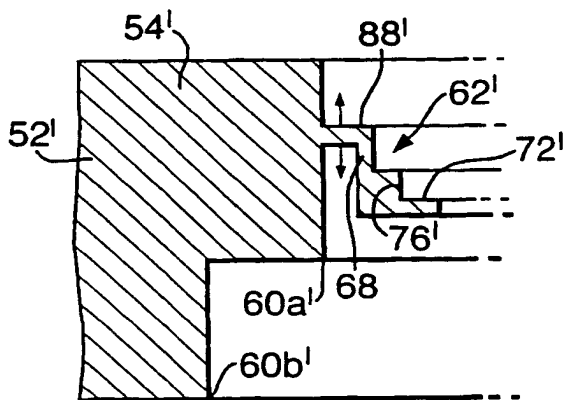


Fig.10.

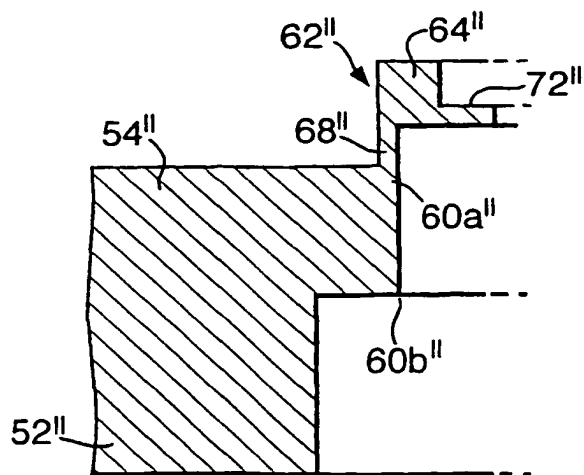

4/6

Fig.11.

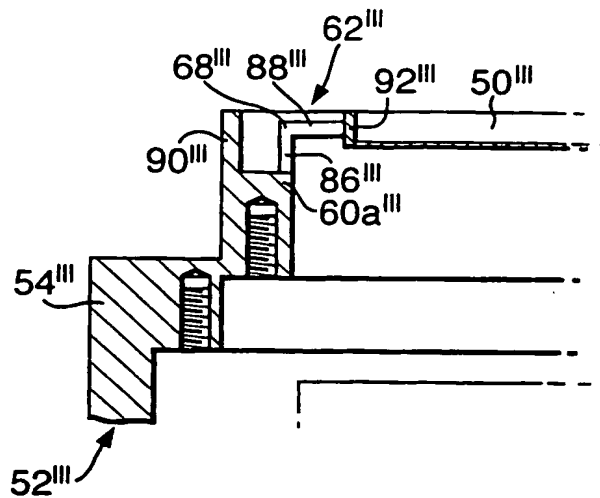


Fig.12.

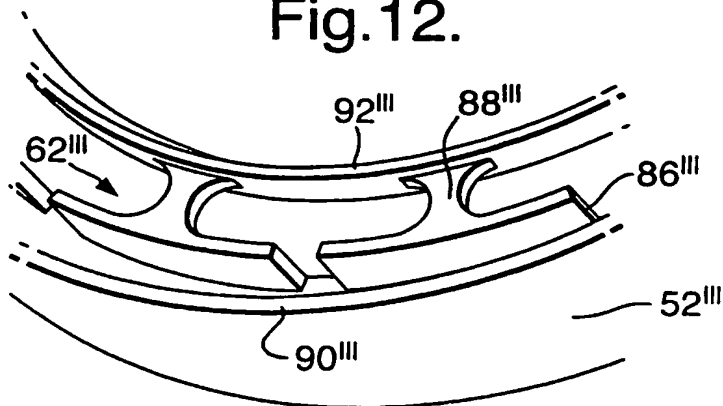


Fig.13.

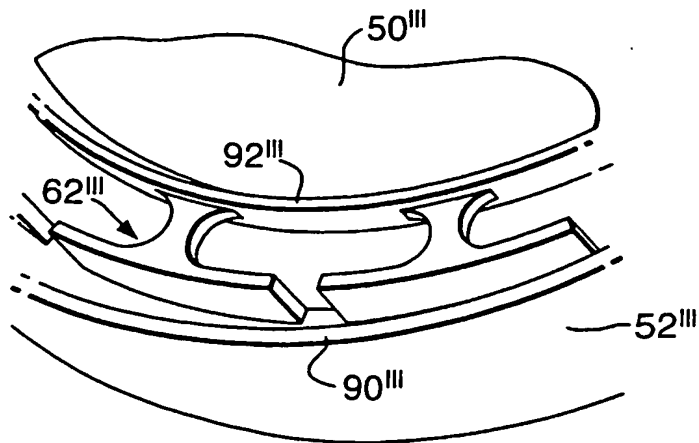


Fig.14a.

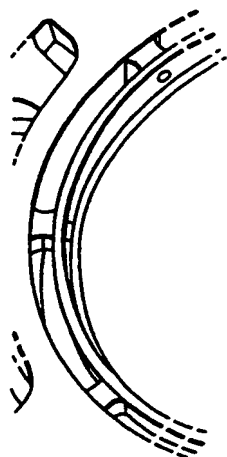


Fig.14b.

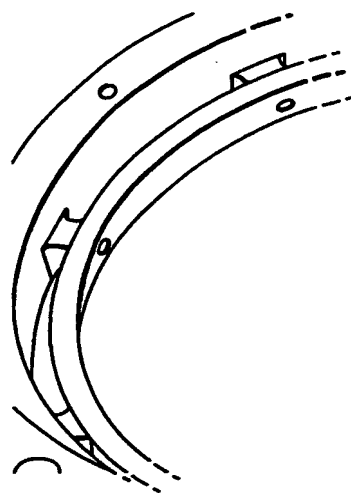


Fig.15.

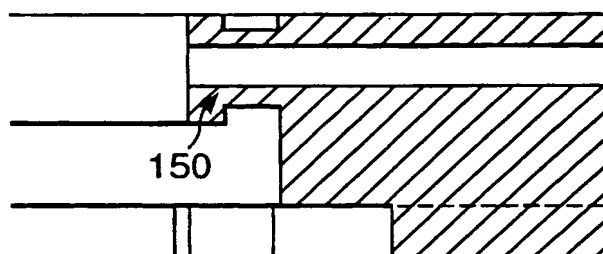


Fig.16.


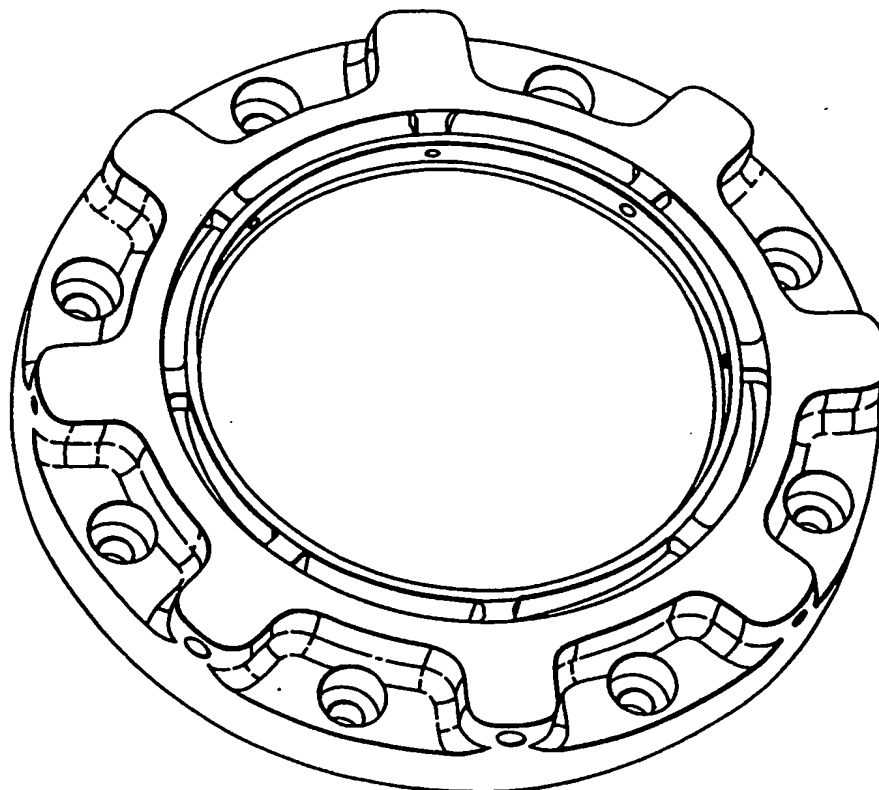


Fig.17.

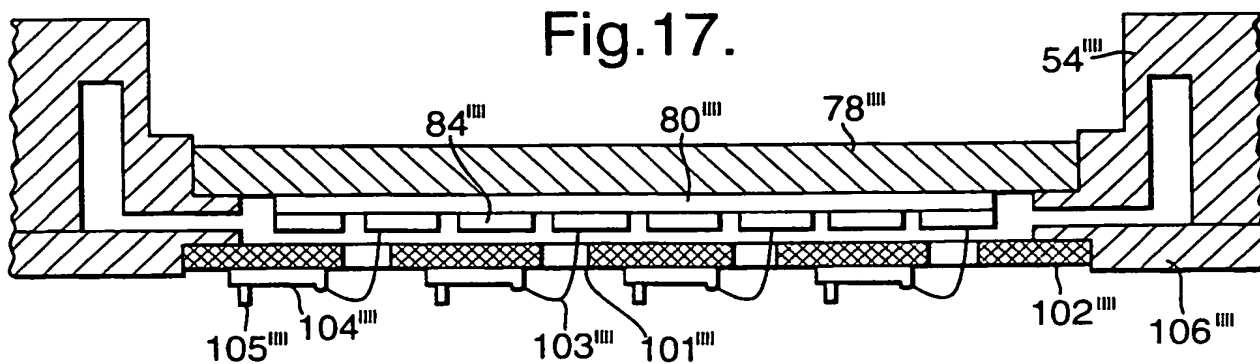

INTERNATIONAL SEARCH REPORT

Internat .pplication No

PCT/GB 03/05547

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 G02B7/00 G02B7/182

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 307 688 B1 (BECKER JOCHEN ET AL) 23 October 2001 (2001-10-23) figures 1,2 claim 1	1-11
X	US 6 398 373 B1 (GUZMAN ANDREW J ET AL) 4 June 2002 (2002-06-04) figure 1 column 3, line 53 -column 4, line 13 --- -/--	1-4,6,9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

20 April 2004

Date of mailing of the international search report

27/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040. Tx. 31 651 epo nl.
 Fax: (+31-70) 340-3016

Authorized officer

Quertemont, E

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/GB 03/05547

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	IKRAMOV A V ET AL: "BIMORPH ADAPTIVE MIRROR" SOVIET JOURNAL OF QUANTUM ELECTRONICS, AMERICAN INSTITUTE OF PHYSICS. WOODBURY, NY, US, vol. 22, no. 2, 1 February 1992 (1992-02-01), pages 163-166, XP000273608 figures 1,2 column 1, line 23-25 -----	1-3,6,9

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat

Application No

PCT/GB 03/05547

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6307688	B1	23-10-2001	DE 19859634 A1	29-06-2000
			EP 1014139 A2	28-06-2000
			JP 2000195788 A	14-07-2000
			TW 518428 B	21-01-2003
US 6398373	B1	04-06-2002	AU 8112901 A	18-02-2002
			EP 1307777 A2	07-05-2003
			JP 2004506236 T	26-02-2004
			WO 0212948 A2	14-02-2002